


# QTI-VM541QS Real time In-Line ESD Monitor solution

Model	Range	Accuracy	Resolution	Probe Distance
TRE-542A-1	±10KV	Reading: 5% Full scale: ±0.2%	10V	15mm~30mm
TRE-542A-2	±20KV	Reading: 5% Full scale: ±0.2%	10V	30mm~60mm
Model	Range	Accuracy	Response Time	Probe Distance
TRE-541A-1	0~±1000V	Full scale: 1%	50ms	2.5mm ±1mm
TRE-541A-2	0~±100V	Full scale: 1%	50ms	2.5mm ±1mm

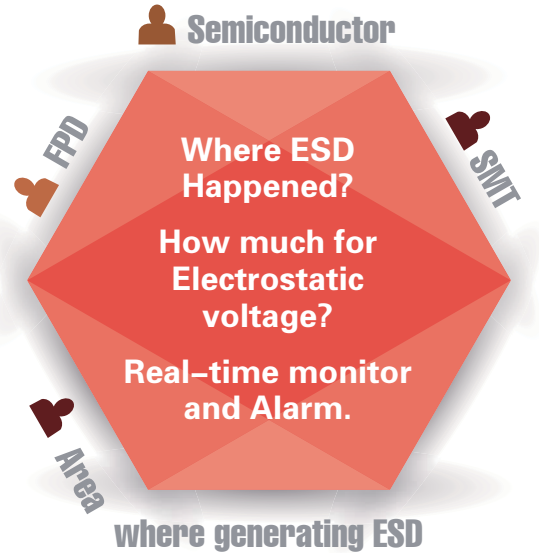

## Meet Customer inquiry through ESD monitor system

### Advantage:

TREK ESD tester **Best Accuracy** **Best stability**  
**one system support 16 sets tester** cover whole products line;  
**B/S Structure** Software with **SQL database**  
 Customer can monitor in office, home, anywhere have internet,  
 customer also can integrate our database to your own monitor  
 system easily;

### ESD issue Area example:

